

1 UPS 32-60 F



: 96401771

* 3
*
*
*
*
*
*

- 1 -

: -10 .. 120 °C
60 °C
983.2 / 3



: AAA,EAC

EN-JL1040
ASTM 35 B - 40 B





DIN W.-Nr. 1.4301
AISI 304

: 0 .. 40 °C
 : 10
 : DIN
 : DN 32
 : PN 6 / PN 10
 : 220
 C : - : 6
 : 1: 170
 : 2: 180
 : 190
 : 50 Hz
 : 1 x 230-240 V
 : 1: 0.84 A
 : 2: 0.86 A
 : 3: 0.88 A
 Cos 1: 0.88
 Cos 2: 0.91
 Cos : 0.94
 : 6 /400 V
 (IEC 85): F
 Enclosure class (IEC 60529): X4D
 : 17.3
 : 17.5
 : 0.026 ³

96401771 UPS 32-60 F 50



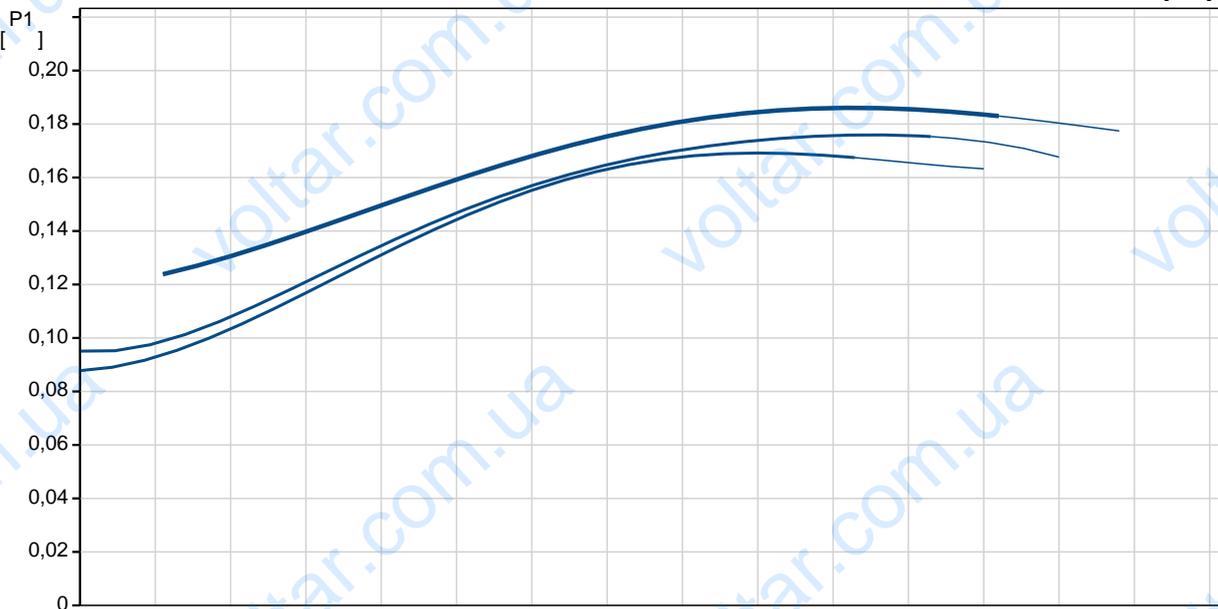
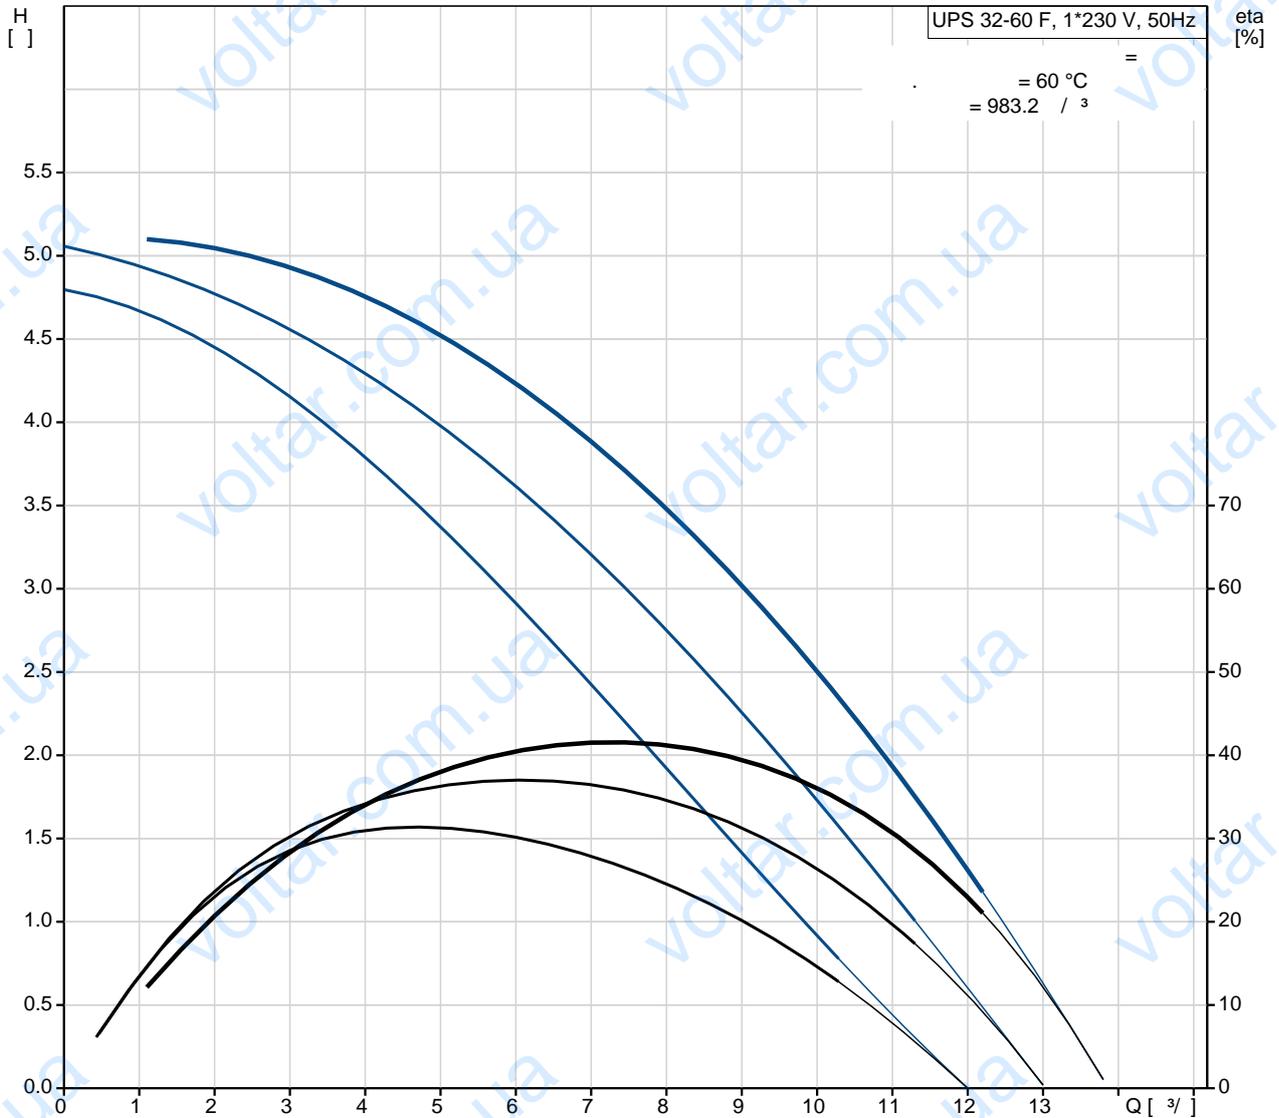


		UPS 32-60 F
		96401771
EAN		5700390904944
		3
		60
		AAA,EAC
		EN-JL1040
		ASTM 35 B - 40 B
		DIN W.-Nr. 1.4301
		AISI 304
		0 .. 40 °C
		10
		DIN
		DN 32
		PN 6 / PN 10
		220
		-10 .. 120 °C
		60 °C
		983.2 / ³
C		6
	1:	170
	2:	180
		190
		50 Hz
		1 x 230-240 V
	1:	0.84 A
	2:	0.86 A
	3:	0.88 A
Cos	1:	0,88
Cos	2:	0,91
Cos		0,94
		6 /400 V
	(IEC 85):	F
	Enclosure class (IEC 60529):	X4D
		CONTACT
		1.30H
		17.3

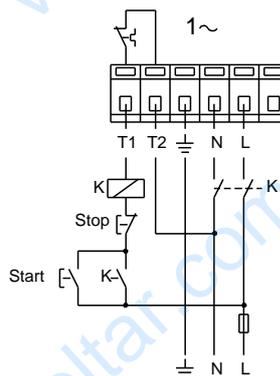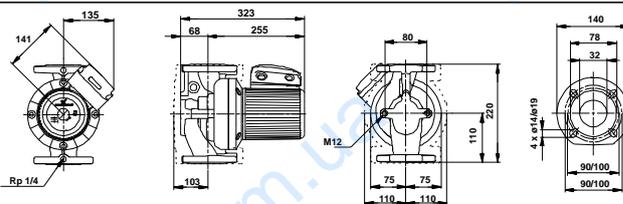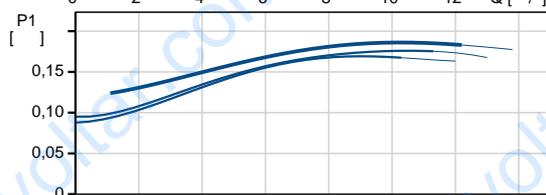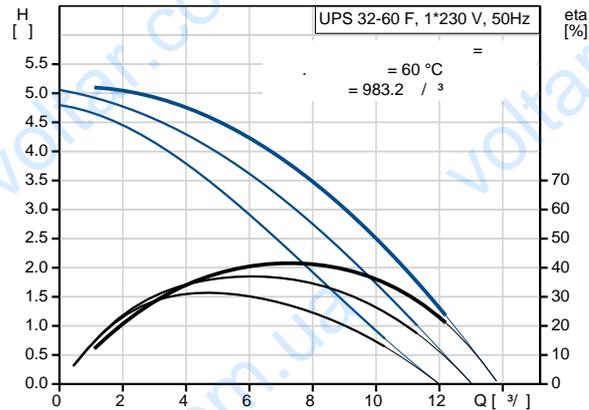


:	17.5
:	0.026 ³

96401771 UPS 32-60 F 50

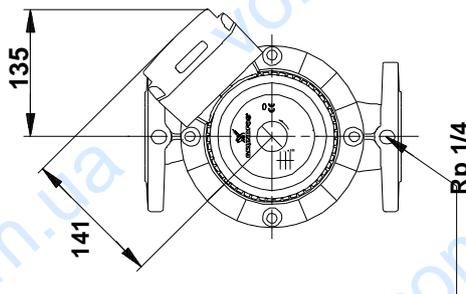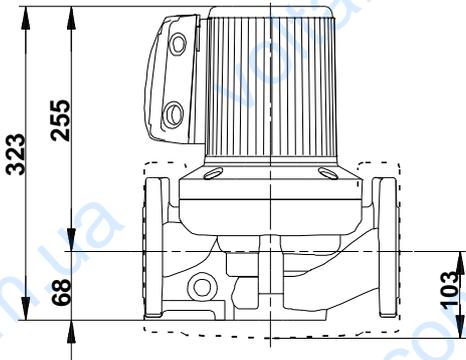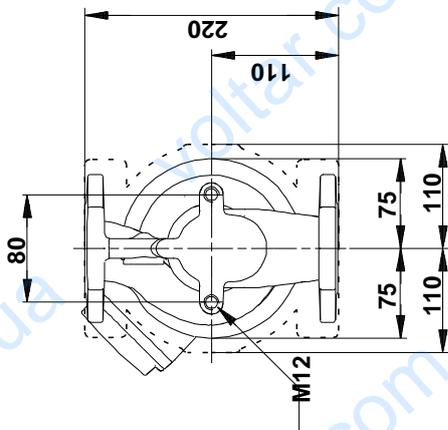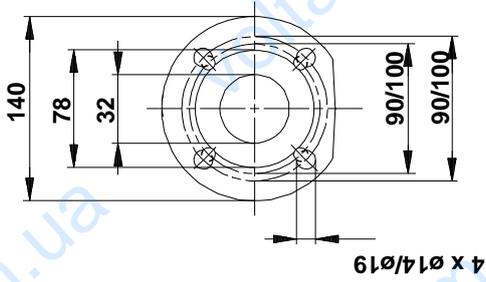

96401771 UPS 32-60 F 50

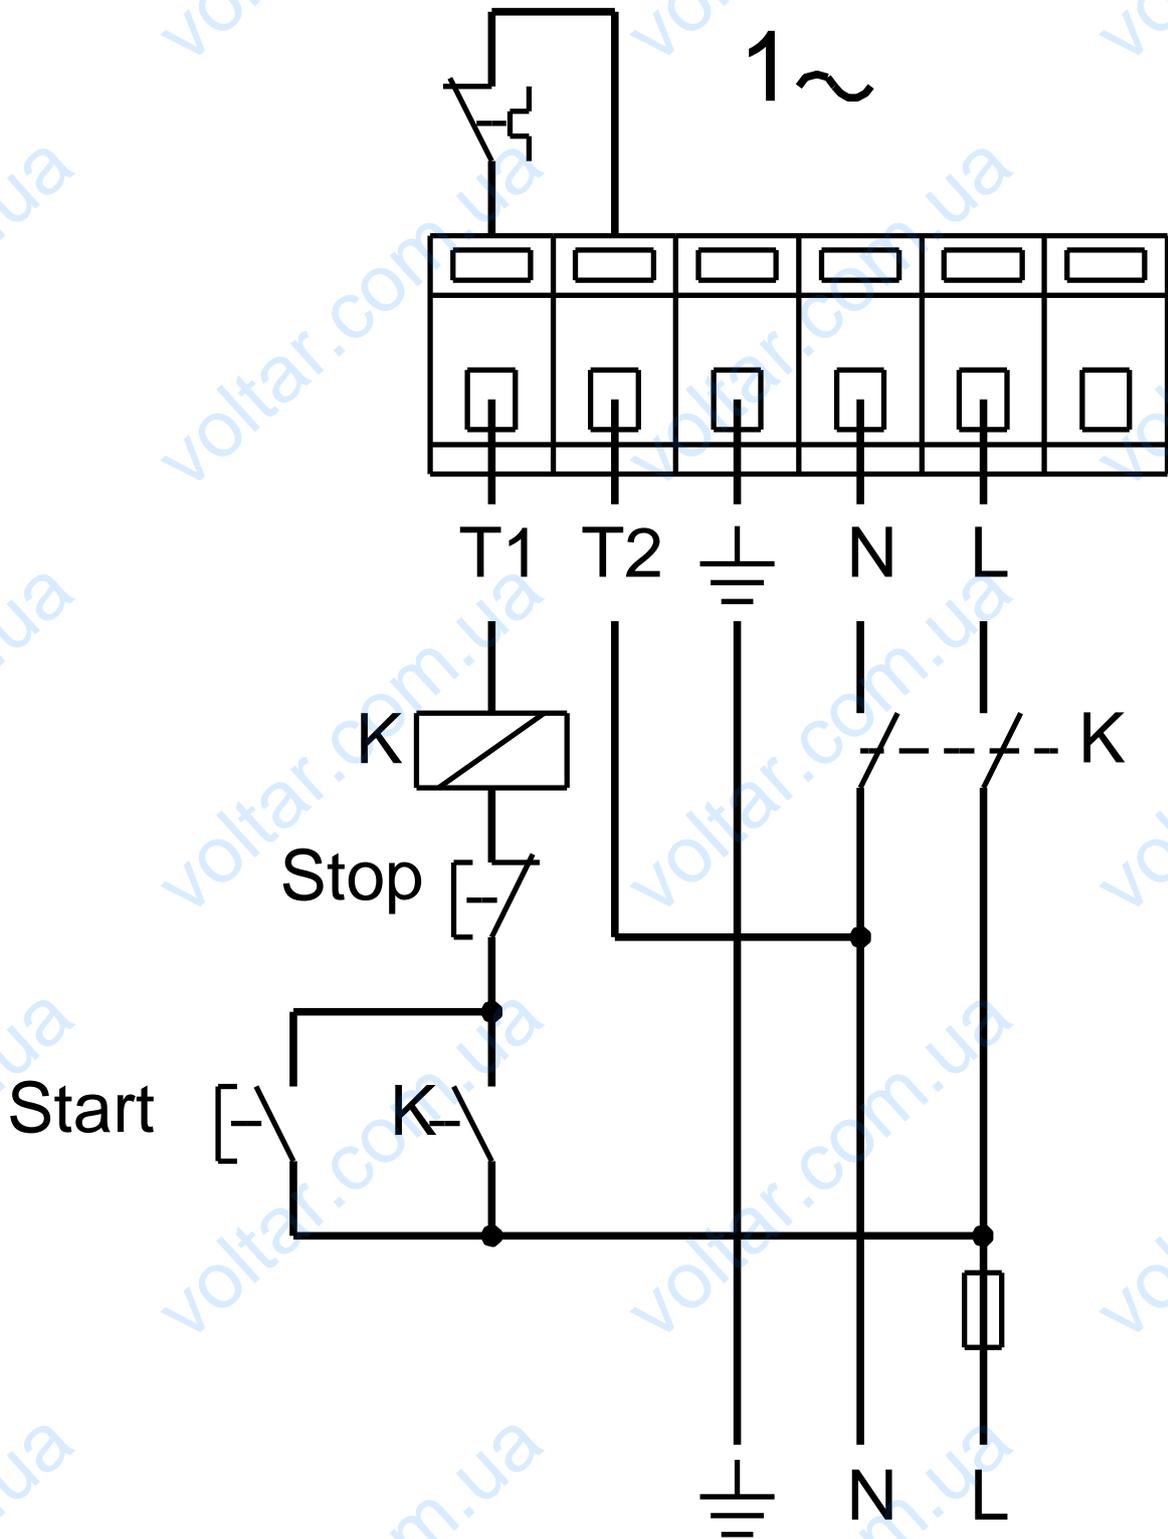

! [] .