

1 UPS 40-180 F



96401977

\* 3  
\*  
\*  
\*  
\*  
\*  
\*

- 1-

: -10 .. 120 °C  
60 °C  
983.2 / 3



: AAA,EAC

EN-JL1040  
ASTM 35 B - 40 B





DIN W.-Nr. 1.4301  
AISI 304

: 0 .. 40 °C  
 : 10  
 : DIN  
 : DN 40  
 : PN 6 / PN 10  
 : 250  
 C : - : 25  
 : 1: 650  
 : 2: 730  
 : 790  
 : 50 Hz  
 : 1 x 230-240 V  
 : 1: 3.15 A  
 : 2: 3.5 A  
 : 3: 3.65 A  
 Cos 1: 0,9  
 Cos 2: 0,91  
 Cos : 0,94  
 : 25 /400 V  
 (IEC 85): H  
 Enclosure class (IEC 60529): X4D  
 : 22.6  
 : 25.3  
 : 0.043 <sup>3</sup>

## 96401977 UPS 40-180 F 50



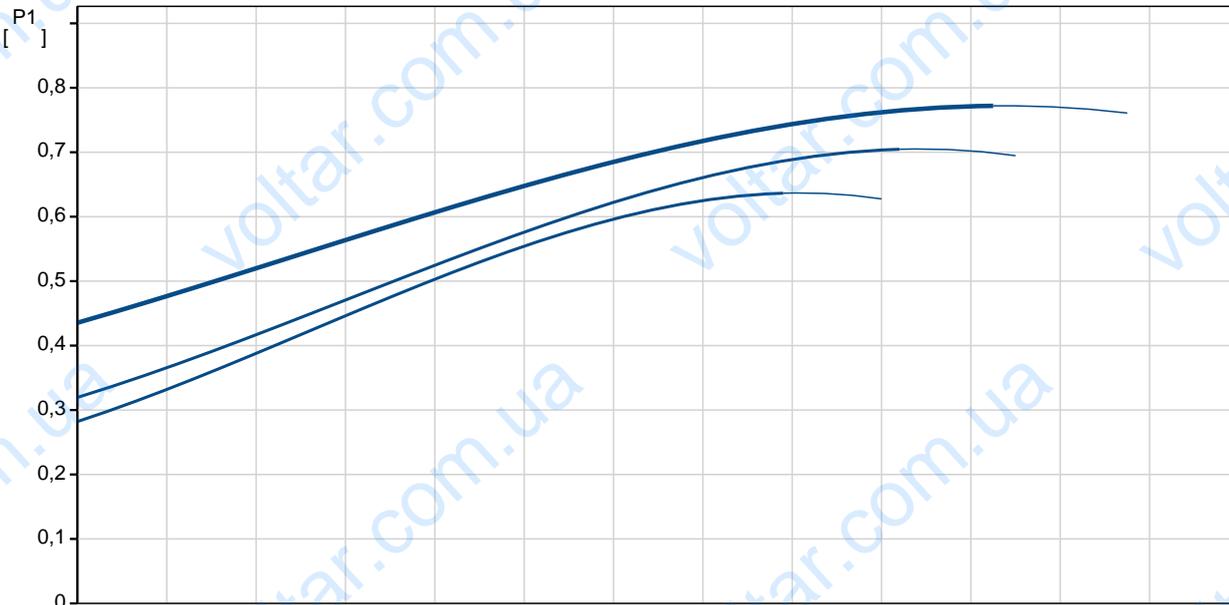
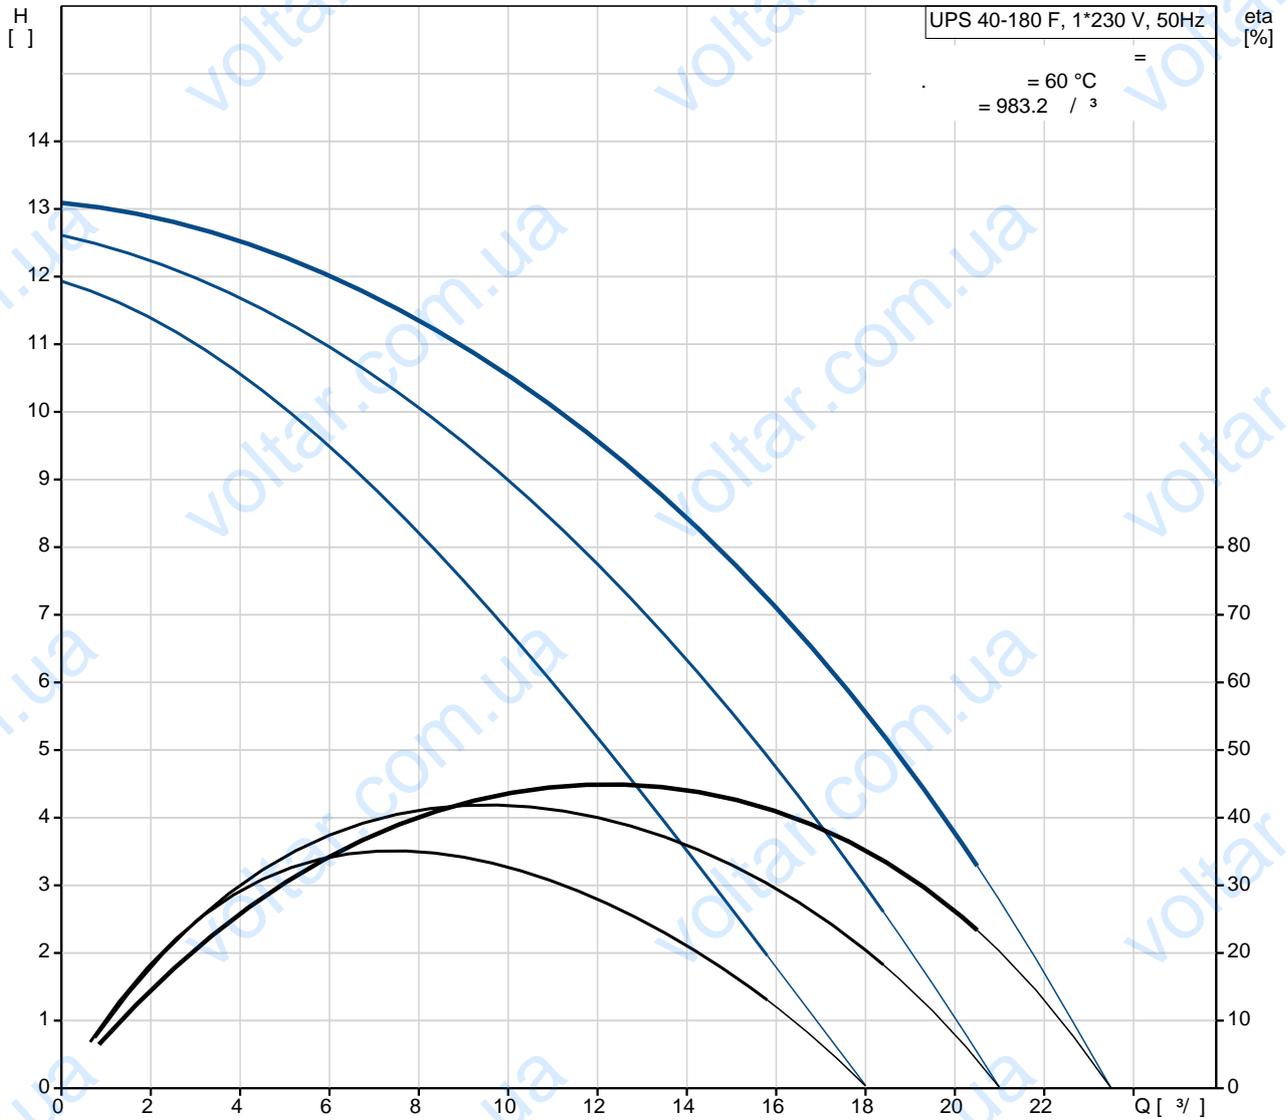


		UPS 40-180 F
		96401977
EAN		5700390656188
		3
		180
		AAA,EAC
		EN-JL1040
		ASTM 35 B - 40 B
		DIN W.-Nr. 1.4301
		AISI 304
		0 .. 40 °C
		10
		DIN
		DN 40
		PN 6 / PN 10
		250
		-10 .. 120 °C
		60 °C
		983.2 / ³
C		25
	1:	650
	2:	730
		790
		50 Hz
		1 x 230-240 V
	1:	3.15 A
	2:	3.5 A
	3:	3.65 A
Cos	1:	0,9
Cos	2:	0,91
Cos		0,94
		25 /400 V
	(IEC 85):	H
Enclosure class (IEC 60529):		X4D
		CONTACT
		1.30H
		22.6

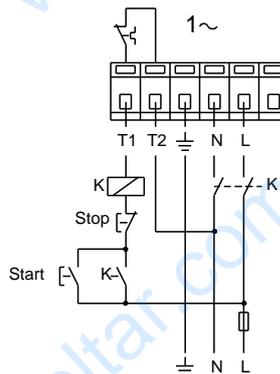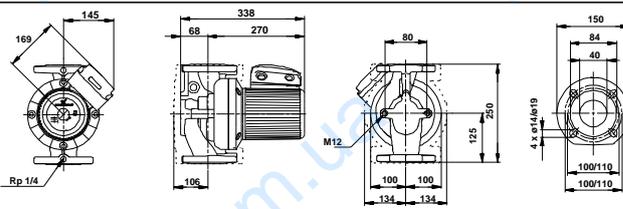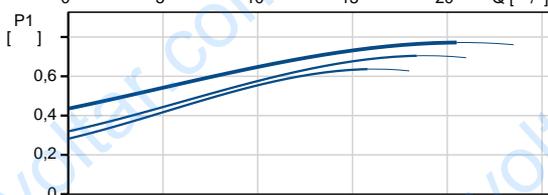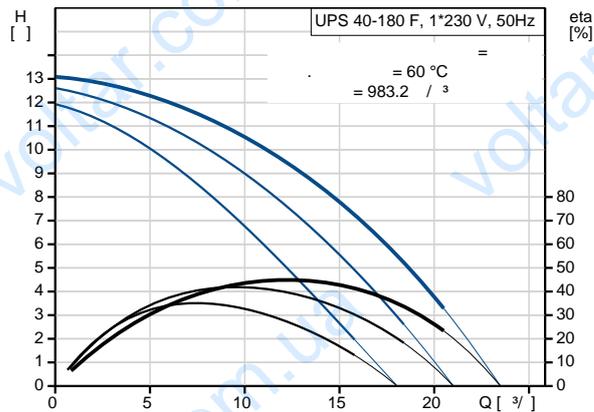

:	25.3
:	0.043 <sup>3</sup>

## 96401977 UPS 40-180 F 50

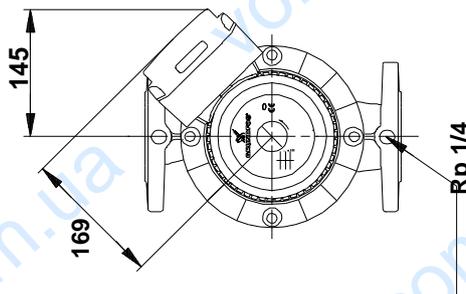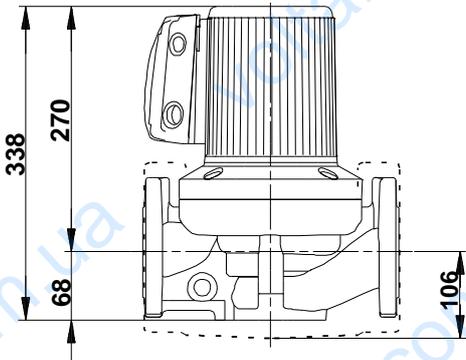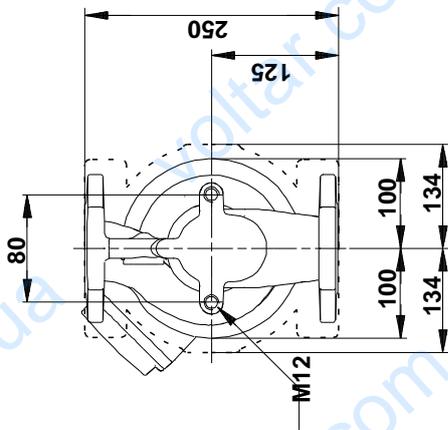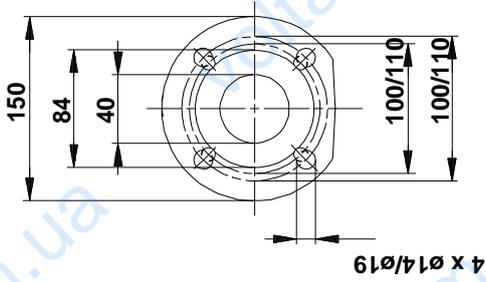

96401977 UPS 40-180 F 50

