

1 **SQE 2-100**



: 96510154

3"

: 35 °C

0,15 / : 35 °C

: 20 °C

998.2 / <sup>3</sup>

10700 /

2 <sup>3</sup>/

108

: CE,UL,CUL

- : ISO9906:2012 3B

Polyamide /

DIN W.-Nr. 1.4301

AISI 304

DIN W.-Nr. 1.4301





AISI 304



:  
: Rp 1 1/4  
: 76  
:  
: MSE3  
- P1: 2.32  
- P2: 1.55  
: 50 Hz  
: 1 x 200-240  
: 11.2 A  
: 1.00  
: 10700 /  
: (IEC 34-5): IP68  
: (IEC 85): F  
: 1.5  
:  
: 6.2  
: 6.8  
: 0.01 <sup>3</sup>  
Danish VVS No.: 388442500  
Swedish RSK No.: 5853373  
Finnish: LVI NO 4762533  
Norwegian NRF no.: 9041354



Model	SQE 2-100
EAN	5700396502526
Part No.	10700 /
Material	2 3/
Weight	108
Dimensions	6
Standards	: CE,UL,CUL ISO9906:2012 3B 96080405 B
Material	Polyamide /
Material	DIN W.-Nr. 1.4301 AISI 304
Material	DIN W.-Nr. 1.4301 AISI 304
Material	Rp 1 1/4 76
Temperature	: 35 °C
Temperature	. t 0,15 / : 35 °C
Temperature	: 20 °C
Temperature	: 998.2 / 3
Material	MSE3
Material	- P1: 2.32
Material	- P2: 1.55
Frequency	: 50 Hz
Power	: 1 x 200-240
Current	: 11.2 A
Efficiency	: 1.00
Efficiency	: 10700 /
Protection	(IEC 34-5): IP68
Protection	(IEC 85): F
Material	: Y
Material	: 1.5
Material	: 96160856
Material	CU 300/CU 301: CU
Material	: 300/CU 301
Material	: 6.2
Material	: 6.8
Material	: 0.01 3
Material	: EU/S-AMREG/APRE G

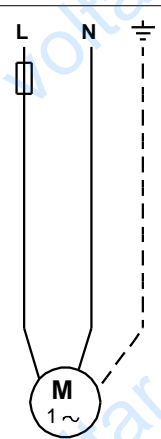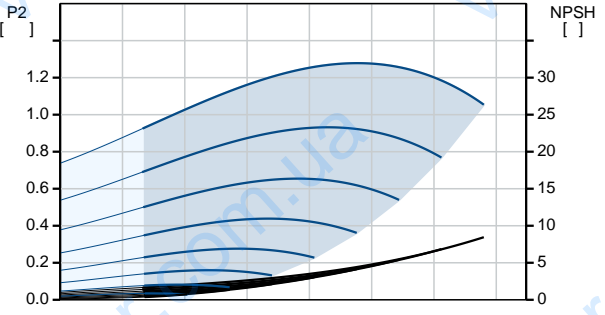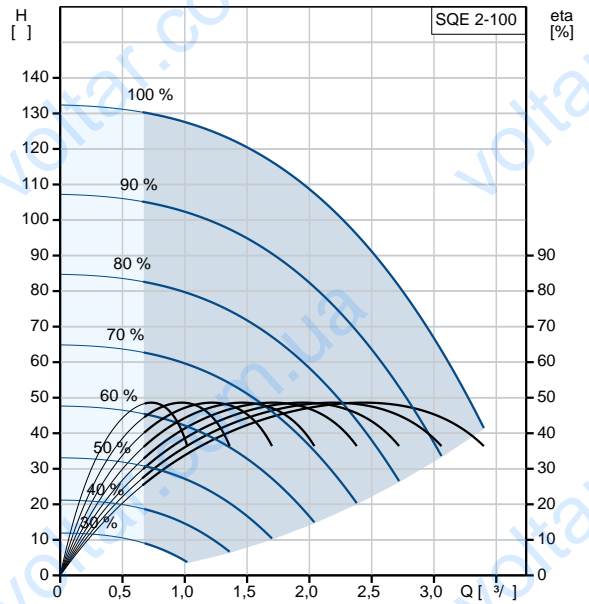




Danish VVS No.:	388442500
Swedish RSK No.:	5853373
Finnish:	LVI NO 4762533
Norwegian NRF no.:	9041354

**GRUNDFOS** 

**96510154 SQE 2-100 50**

**74**

**861**

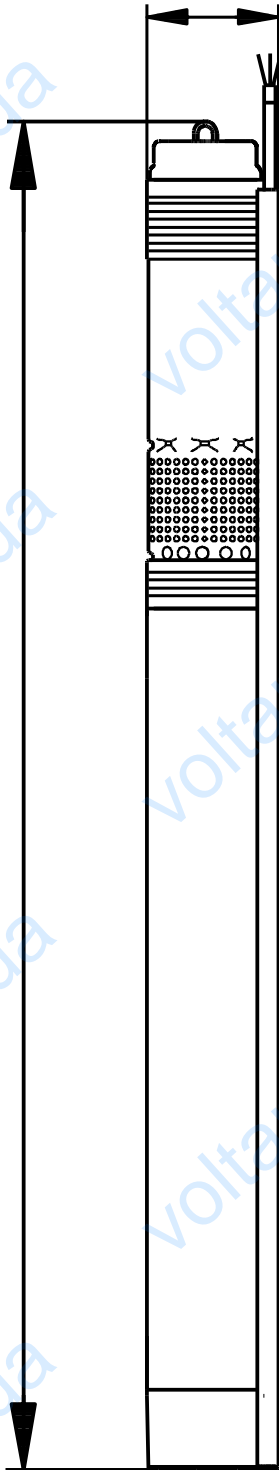

96510154 SQE 2-100 50

