

1 **SQE 3-65**



: 96510159

3"

: 35 °C

0,15 / : 35 °C

: 20 °C

998.2 / <sup>3</sup>

10700 /

3 <sup>3/</sup>

70

: CE,UL,CUL

- : ISO9906:2012 3B

Polyamide /

DIN W.-Nr. 1.4301



AISI 304

DIN W.-Nr. 1.4301





AISI 304

·  
·  
Rp 1 1/4  
· 76  
·  
· MSE3  
- P1: 1.65  
- P2: 1.15  
· 50 Hz  
· 1 x 200-240  
· 8.4 A  
· 1.00  
· 10700 /  
·  
(IEC 34-5): IP68  
(IEC 85): F  
· 1.5  
·  
· 6.6  
· 6.5  
· 0.01 <sup>3</sup>  
Danish VVS No.: 388443465  
Swedish RSK No.: 5853378

## 96510159 SQE 3-65 50

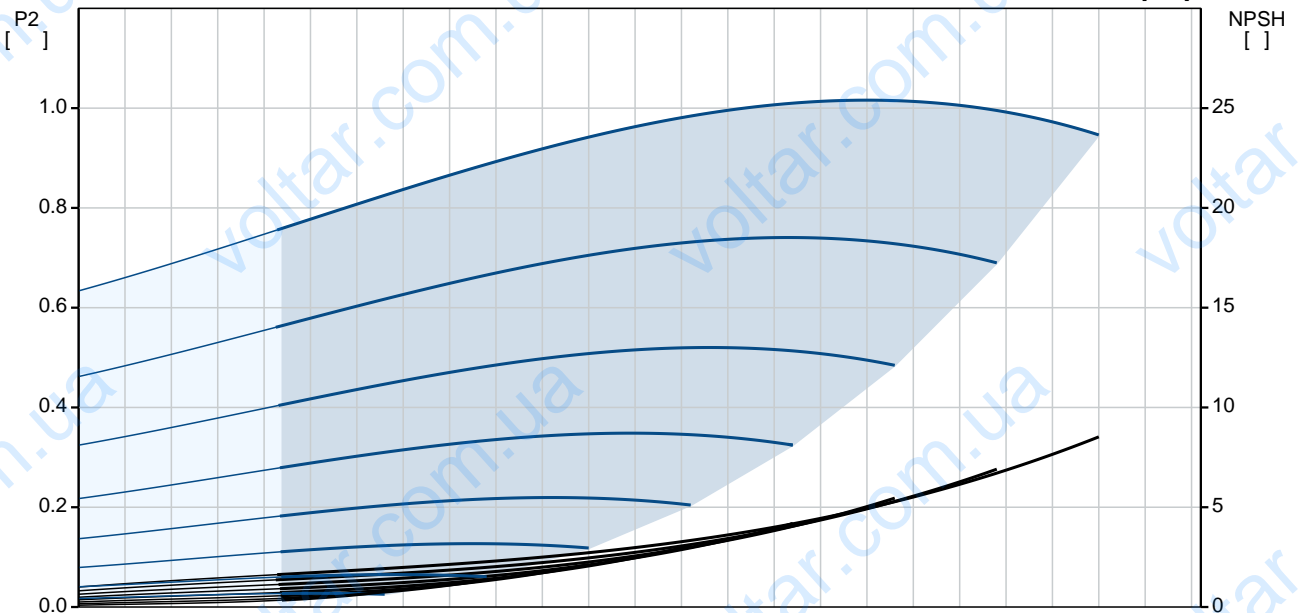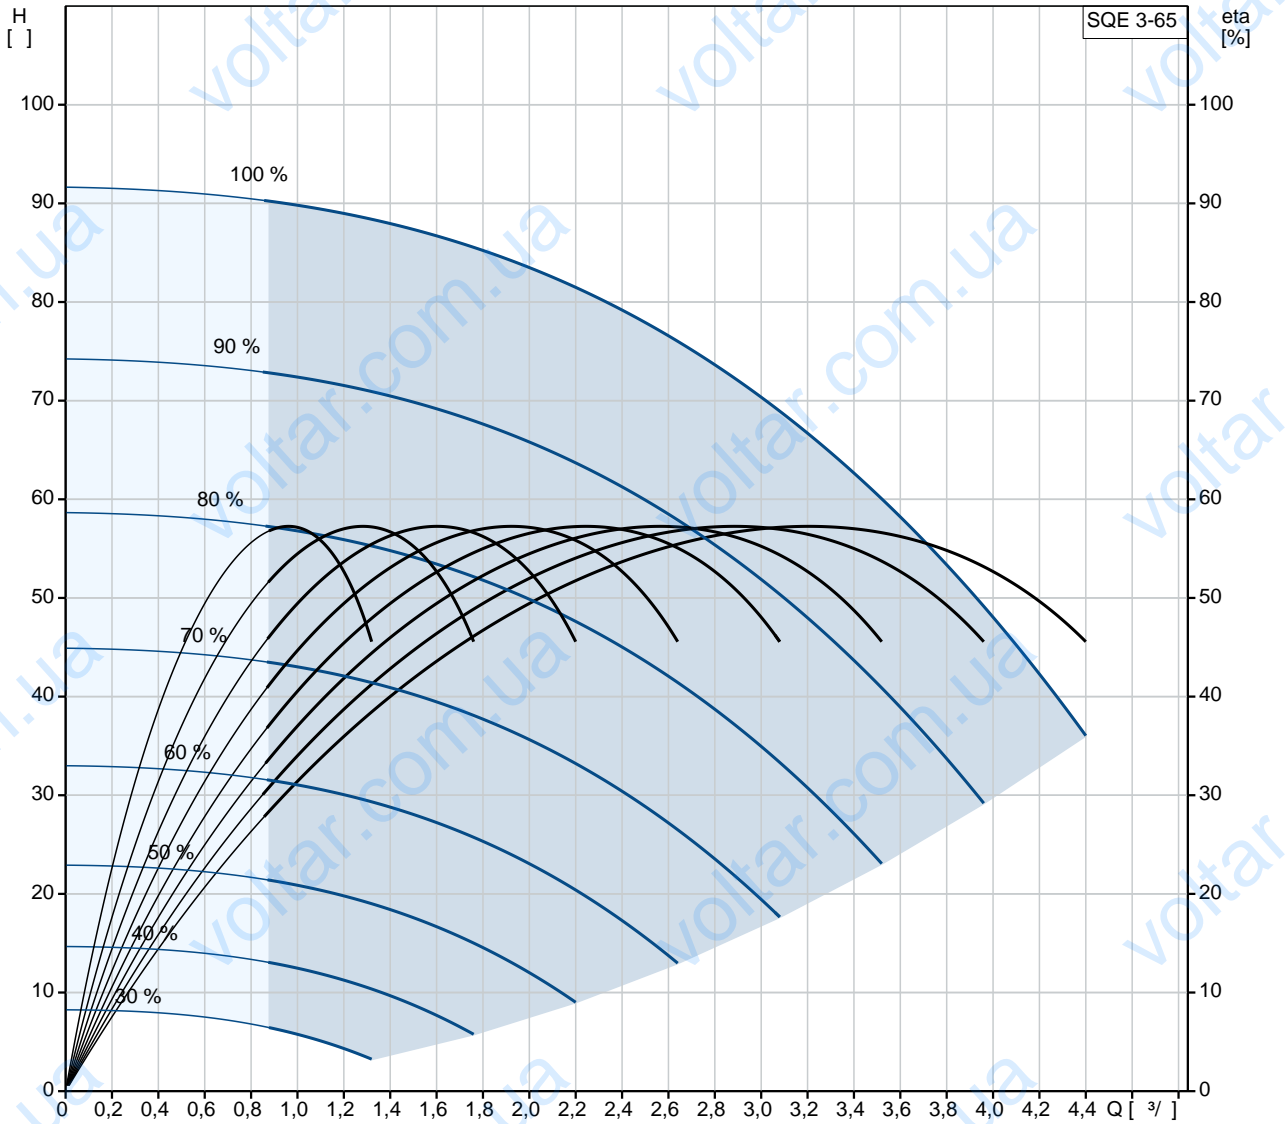

			SQE 3-65
			96510159
EAN	:		5700396502571
			10700 /
			3 ³/
			70
			5
			: CE,UL,CUL
			ISO9906:2012 3B
			96080397
			B
			Polyamide /
			DIN W.-Nr. 1.4301
			AISI 304
			DIN W.-Nr. 1.4301
			AISI 304
			Rp 1 1/4
			76
			35 °C
. t	0,15 /		35 °C
			20 °C
			998.2 / ³
			MSE3
		- P1:	1.65
		- P2:	1.15
			50 Hz
			1 x 200-240
			8.4 A
			1.00
			10700 /
		(IEC 34-5):	IP68
		(IEC 85):	F
			Y
			1.5
			96160855
CU 300/CU 301:			CU
			300/CU 301
			6.6
			6.5
			0.01 ³
			EU/S-AMREG/APRE
			G

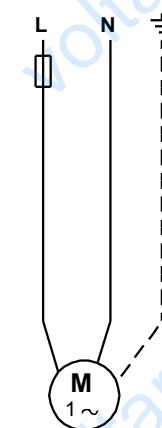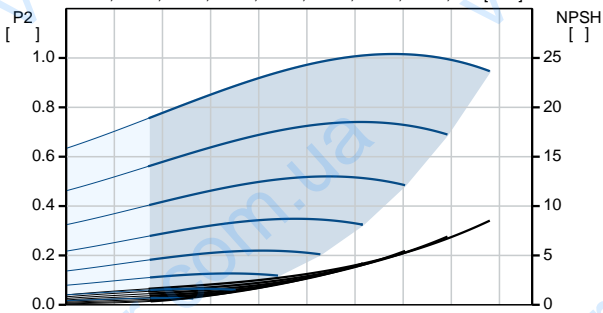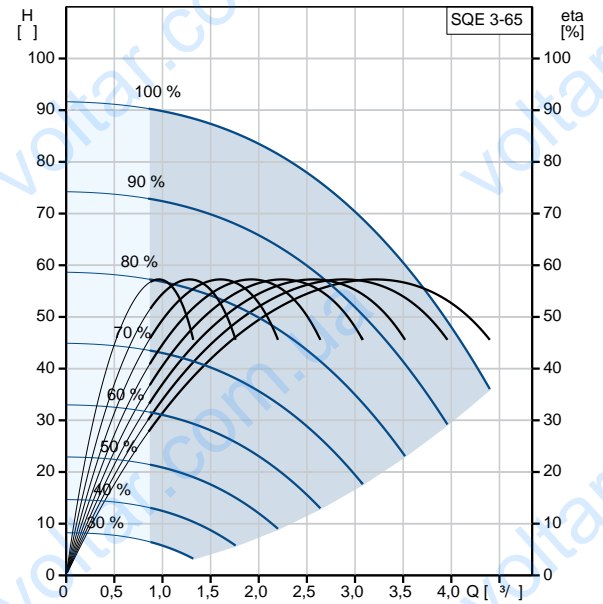



---


Danish VVS No.:	388443465
Swedish RSK No.:	5853378

**GRUNDFOS** 

96510159 SQE 3-65 50

74

825

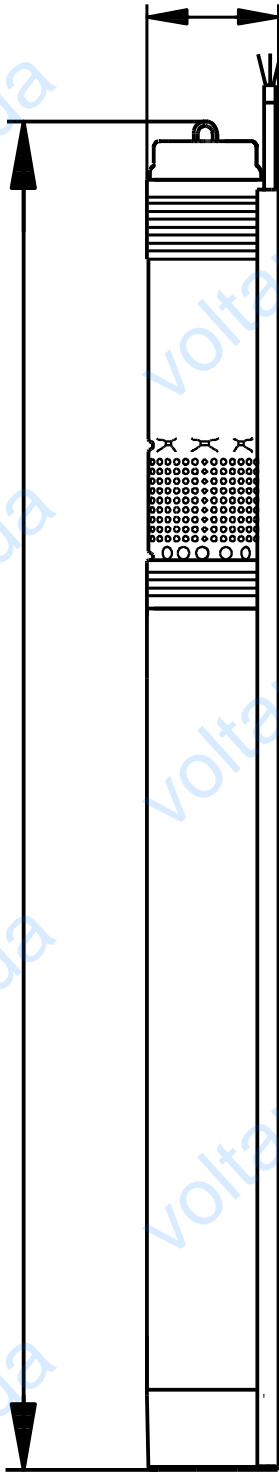

96510159 SQE 3-65 50

