



**SCALA2 3-45 A**

SCALA2 Grundfos

. SCALA2

SCALA2

- 1.
- 2.
- 3.

SCALA2

- 
- 
- 
- 
- 

0,65 ;

5

8

24

5

8

,47 ( )

53

( )

SCALA2

: 0 .. 45 °C

20 °C

998.2 / ³

: 3 ³/

27

: CARBON/CERAMIC

Approvals on nameplate:

Approvals for drinking water:

WRAS,ACS

- : ISO9906:2012 3B



:  
: ( )FE1630PW PPE+PS-GS30  
: ( )FE1630PW PPE+PS-GS30  
:  
: 0 .. 55 °C  
: 10  
Maximum permissible inlet pressure: 6  
: G 1 Composite  
- :  
- P1: 579  
: 50 Hz  
: 1 x 200-240 V  
: 2.8 A  
(IEC 34-5): IPX4D  
(IEC 85): F  
: 2  
Power plug: Type E/F (CEE7/7)  
:  
: 10  
: 12.8  
: 0.044 <sup>3</sup>  
: -40 .. 70 °C

1 SCALA2 3-45 A



: [98562862](#)

SCALA2 Grundfos

. SCALA2

SCALA2

- 1.
- 2.
- 3.

SCALA2

- ;
- ;
- ;
- ;
- ;

0,65 ;

8

5

5

8

24

,47 ( )



53 ( )

SCALA2

: 0 .. 45 °C  
 : 20 °C  
 : 998.2 / 3  
 : 3 3/  
 : 27  
 : CARBON/CERAMIC  
 Approvals on nameplate: CE, VDE  
 Approvals for drinking water: WRAS, ACS  
 : ISO9906:2012 3B  
 : ( ) FE1630PW PPE+PS-GS30  
 : ( ) FE1630PW PPE+PS-GS30  
 : 0 .. 55 °C  
 : 10  
 Maximum permissible inlet pressure: 6  
 : G 1 Composite  
 - :  
 - P1: 579  
 : 50 Hz  
 : 1 x 200-240 V  
 : 2.8 A  
 (IEC 34-5): IPX4D  
 (IEC 85): F  
 : 2  
 Power plug: Type E/F (CEE77)  
 :  
 : 10  
 : 12.8  
 : 0.044 3  
 : -40 .. 70 °C



# 98562862 SCALA2 3-45 50

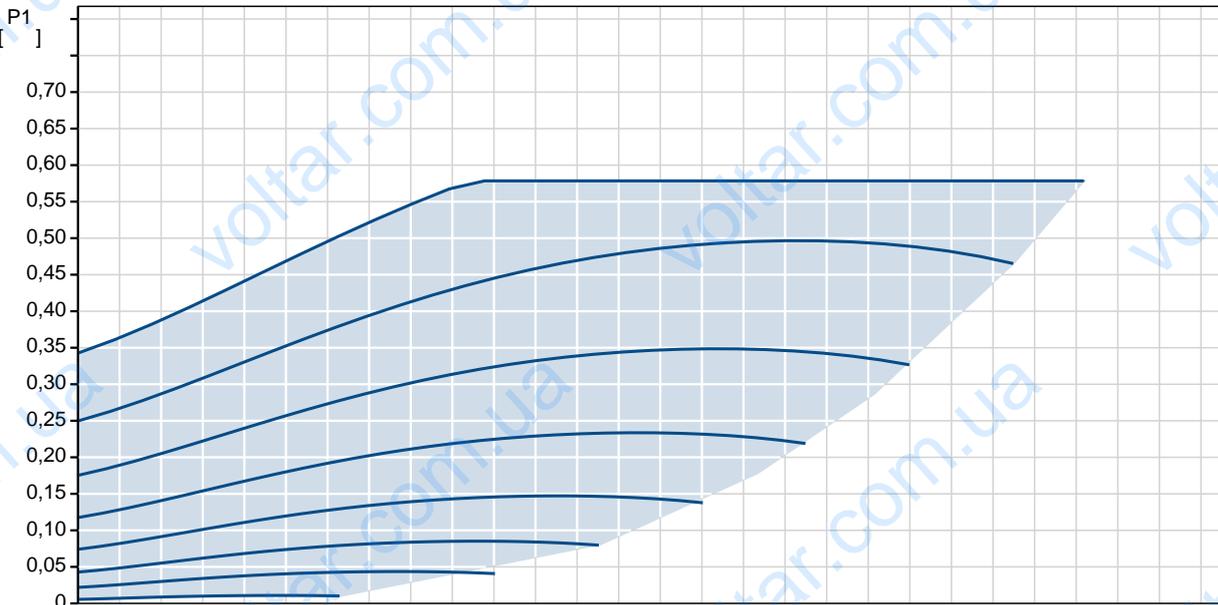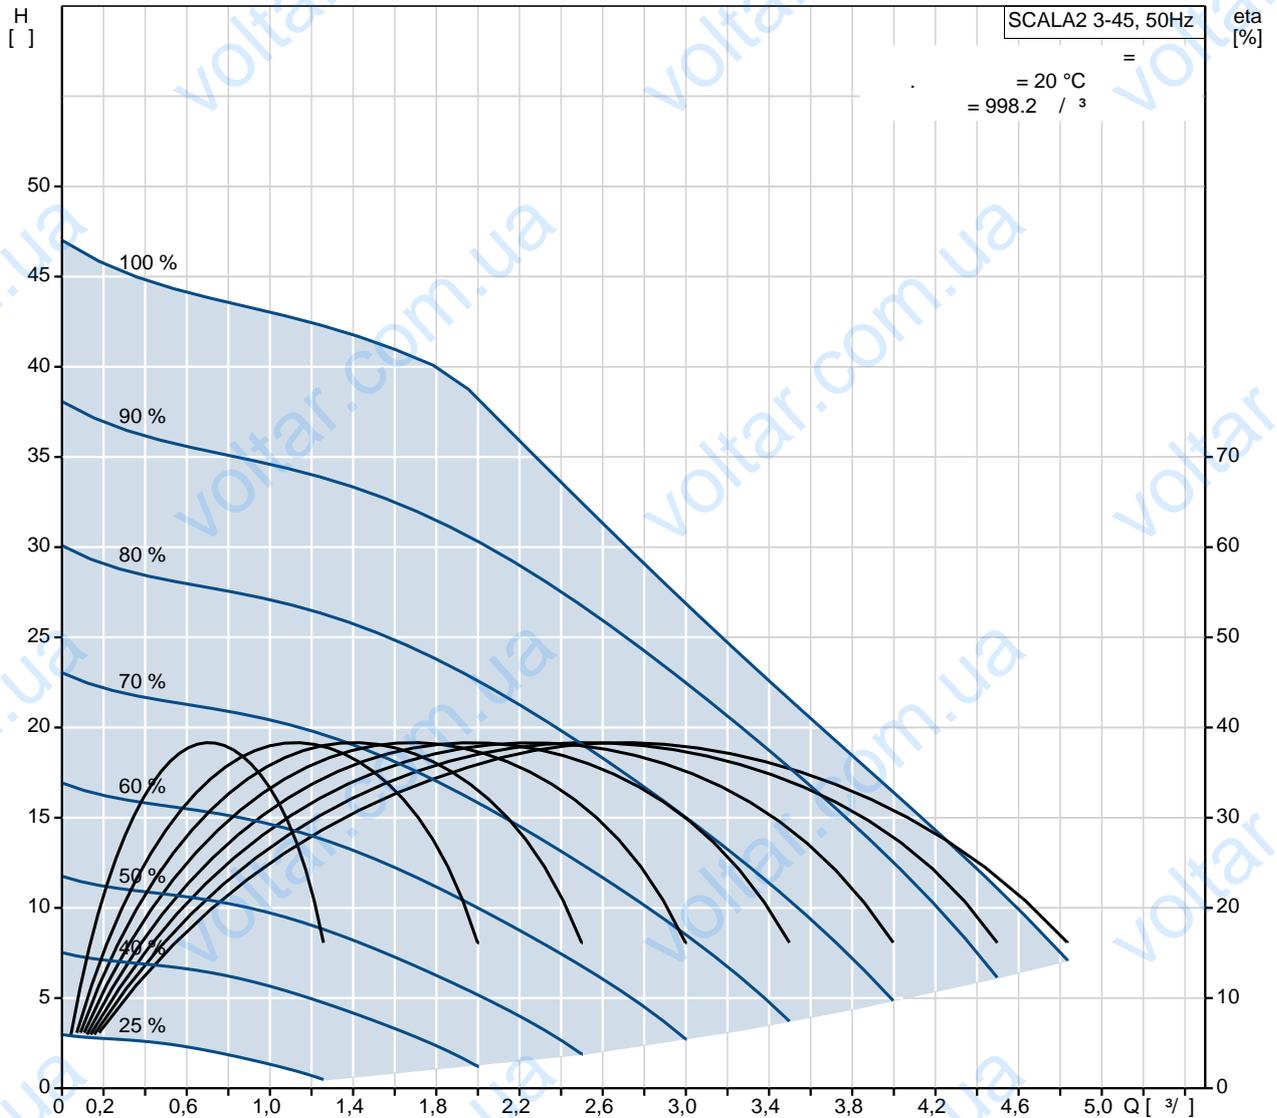





**98562862 SCALA2 3-45 50**

