



www.esbe.se



**SERIES CRA120**




**NO.1 IN HYDRONIC SYSTEM CONTROL**

Mtrl.nr. 9814 03 92 • Ritn.nr. 9212 utg. B • Rev. 1012



Series CRA120




CE  
LVD 2006/95/EC  
EMC 2004/108/EC  
RoHS 2002/95/EEC




**1**

**2**


**3**




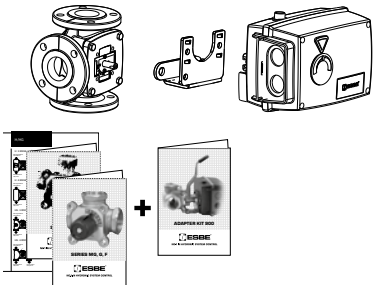



**1**

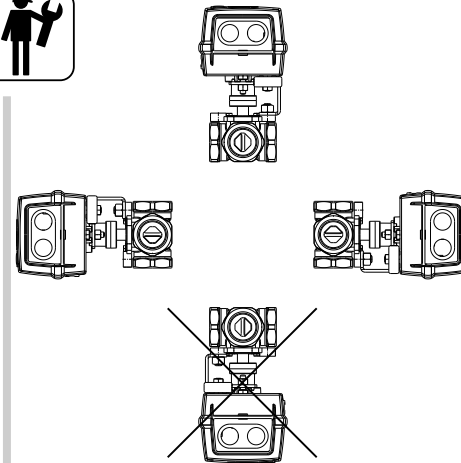

**2**


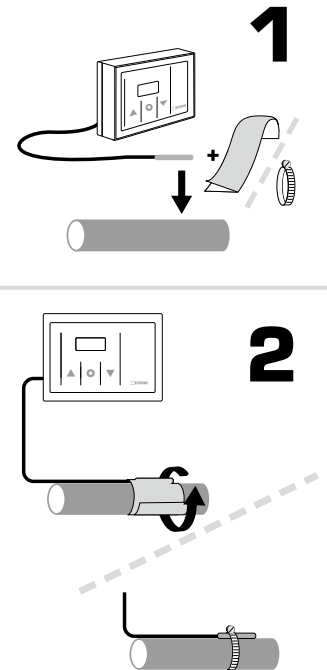


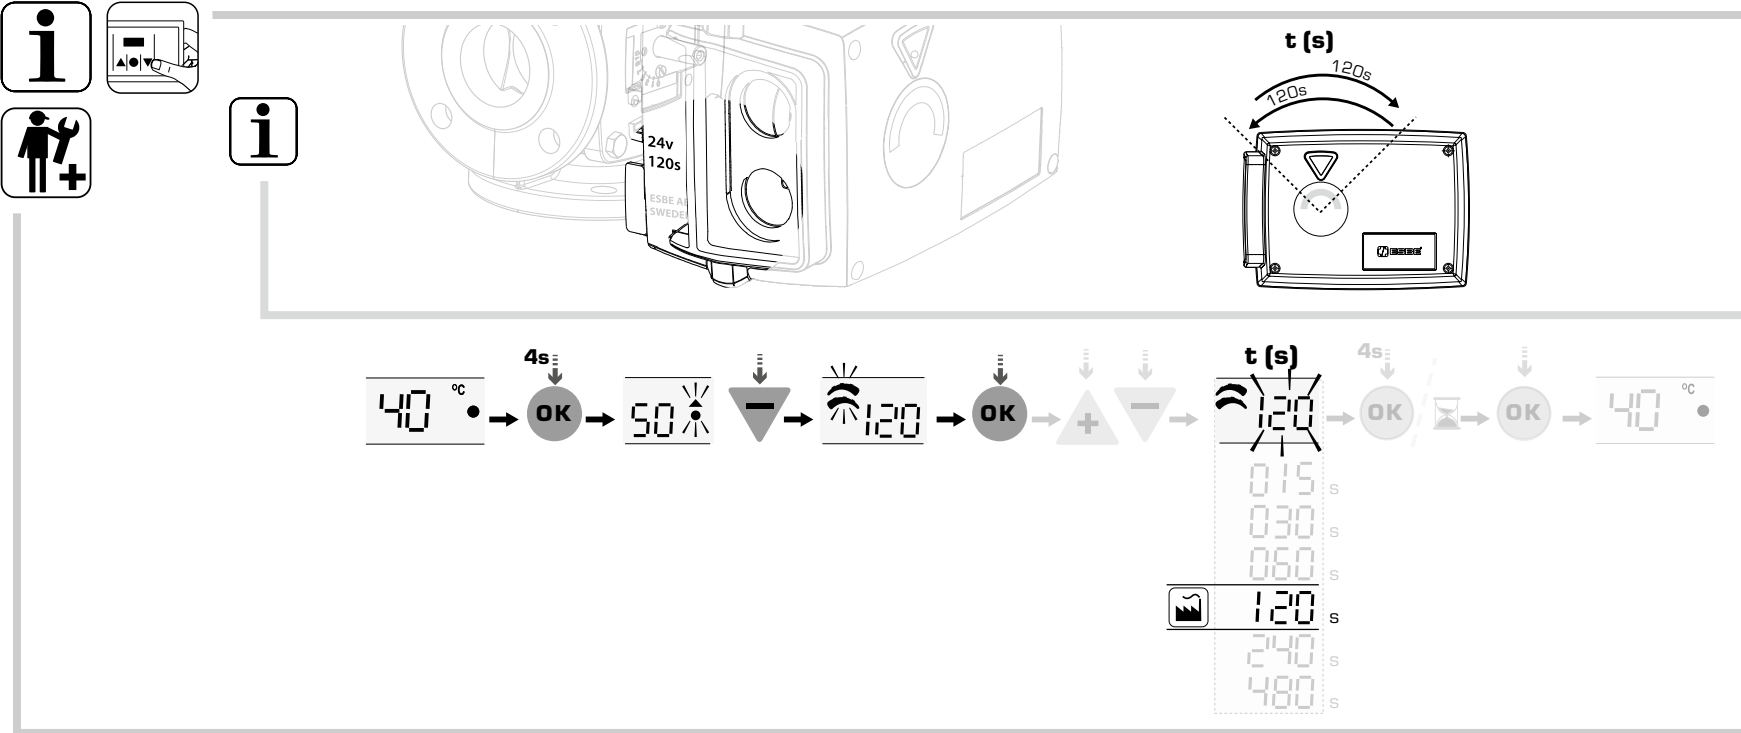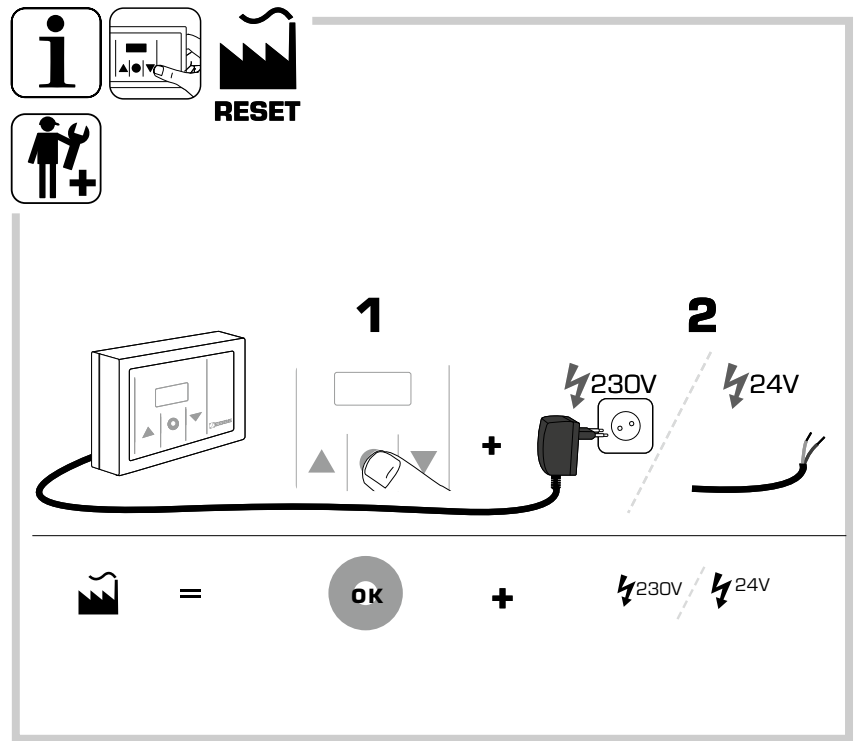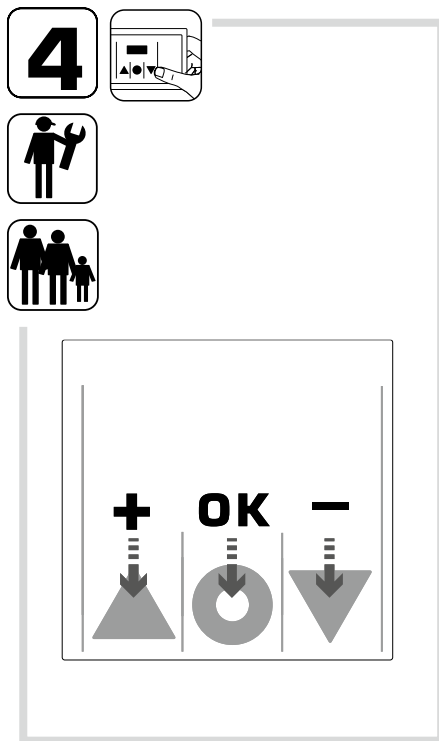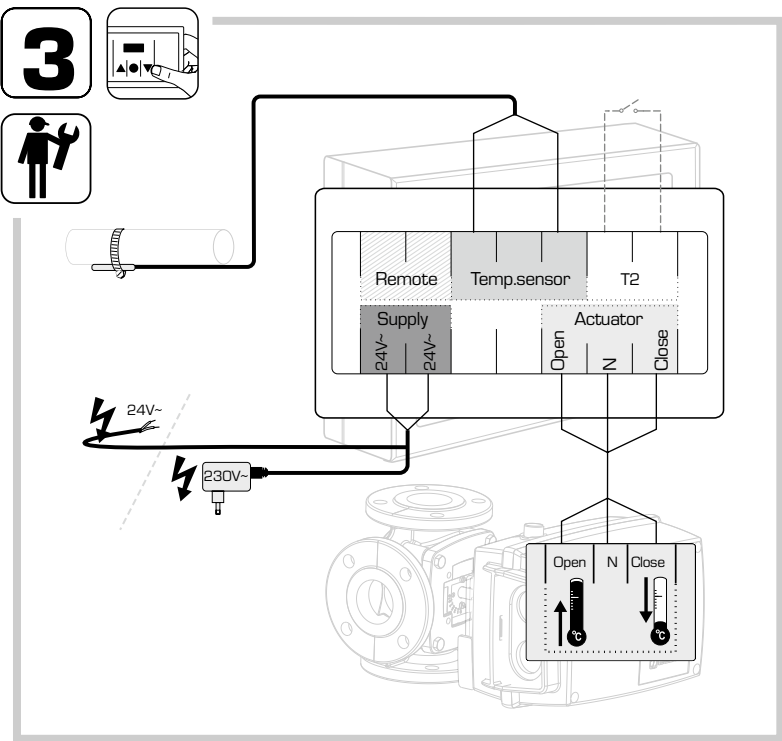





**i**

▲ = MAX °C





	50 °C
	~40 - 50 °C
	~60 - 80 °C
	60 °C


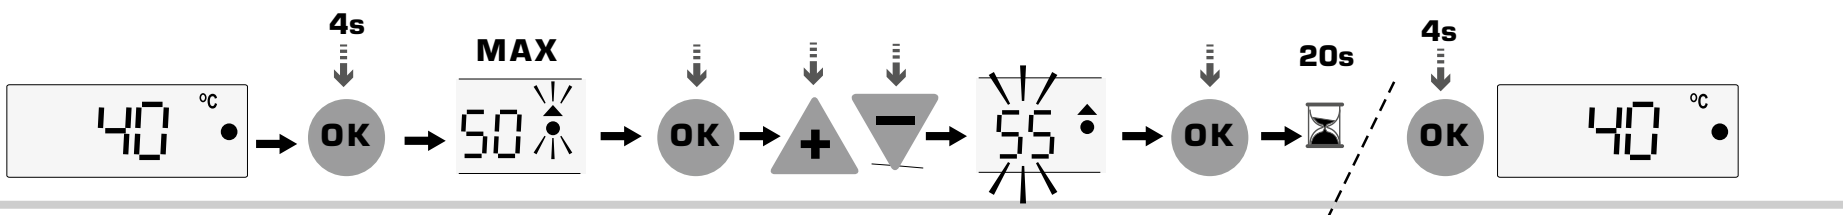


**i**




▼ = MIN °C

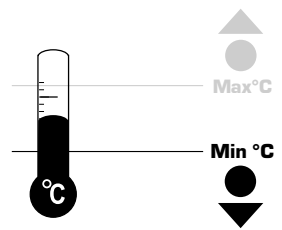




	5 °C
	~5 - 25 °C
	~5 - 25 °C
	~5 - 25 °C

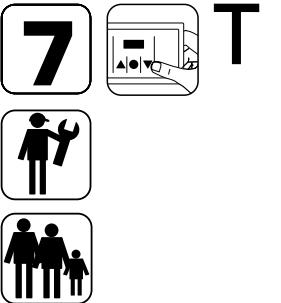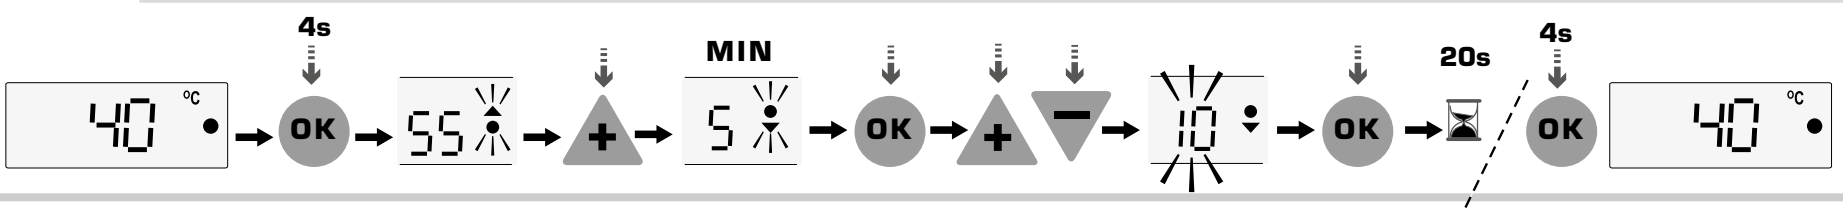



**i**

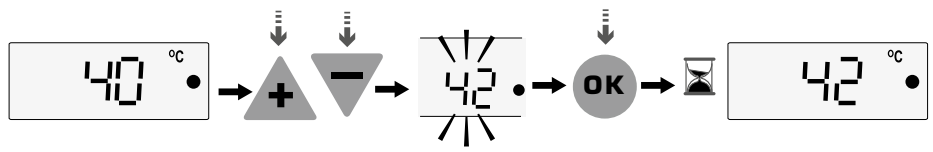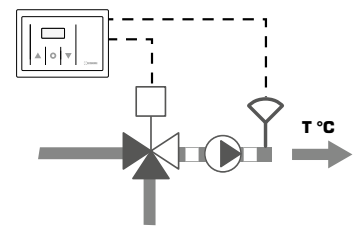

**i** **T2**

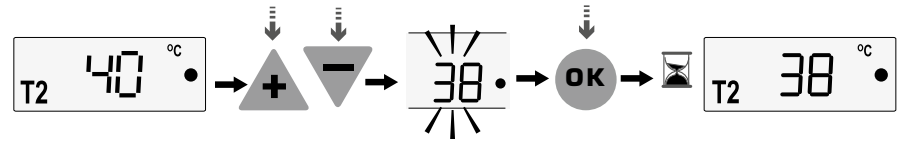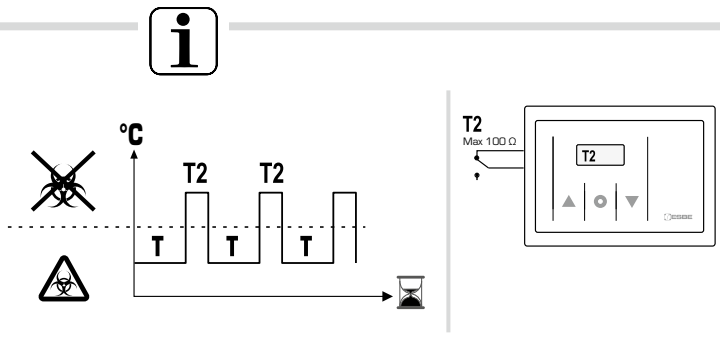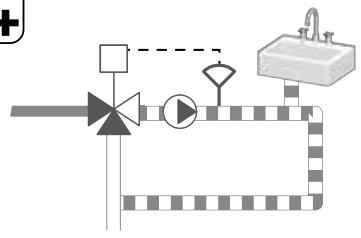

**T**

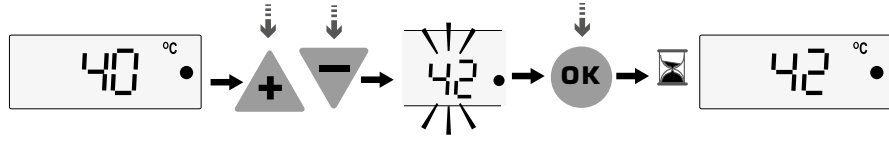



**i**






**1**




**2**

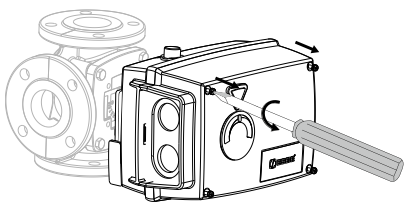

**3**

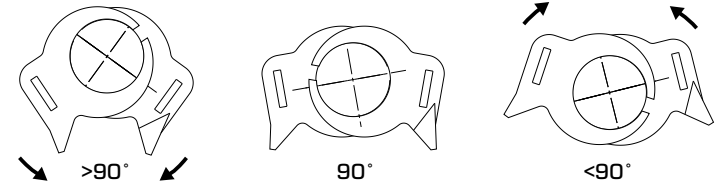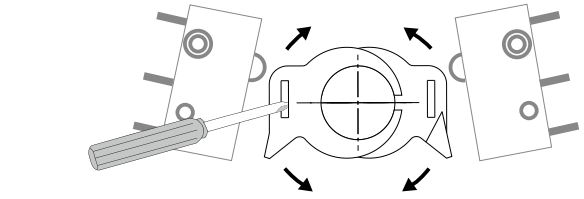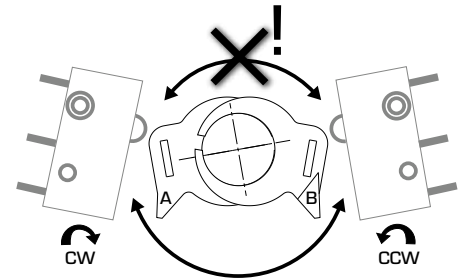

**4**



**5**

