
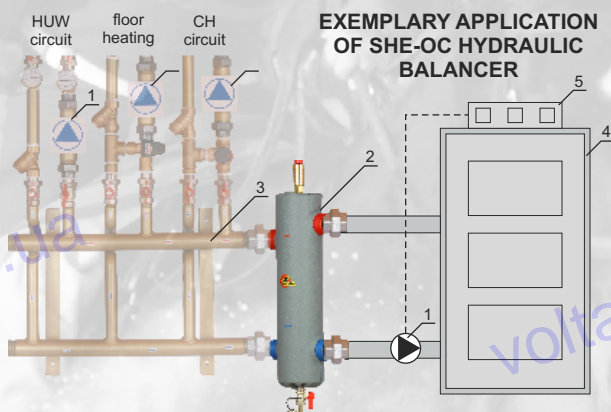


SHE-OC ELTERM INSULATED HYDRAULIC BALANCERS

	SHE40-OC 25/65	SHE70-OC 32/80	SHE100-OC 40/100	SHE115-OC 50/100
Catalogue no.	SHE40-OC	SHE70-OC	SHE100-OC	SHE115-OC
Max. flow	2,3m ³ /h	4,0m ³ /h	5,7m ³ /h	6,6m ³ /h
Max power at ΔT=15K	up to 40kW	up to 70kW	up to 100kW	up to 115kW
4 connectors	1" coupling	5/4" coupling	male thread 1½" h	male thread 2" h
Max. temperature	110°C	110°C	110°C	110°C
Nominal pressure	3 bar	3 bar	3 bar	3 bar
H ₁	290 mm	340 mm	340 mm	400 mm
H ₂	250 mm	300 mm	300 mm	350 mm
H ₃	435 mm	505 mm	508 mm	580 mm
H ₄	77 mm	85 mm	84 mm	90 mm
H _c	~ 600mm	~ 670mm	~ 670mm	~ 745mm
D ₂	Ø 105 mm	Ø 125 mm	Ø 150 mm	Ø 150 mm
Capacity V	1,0 l	1,6 l	2,7 l	3,2 l
p x V (bar x l)	3	4,8	8,1	9,6
Insulation	PUR foam 0,025 W/mK	PUR foam 0,025 W/mK	PUR foam 0,025 W/mK	PUR foam 0,025 W/mK
Leatherette coat	YES	YES	YES	YES
Vent + drain valve	included	included	included	included

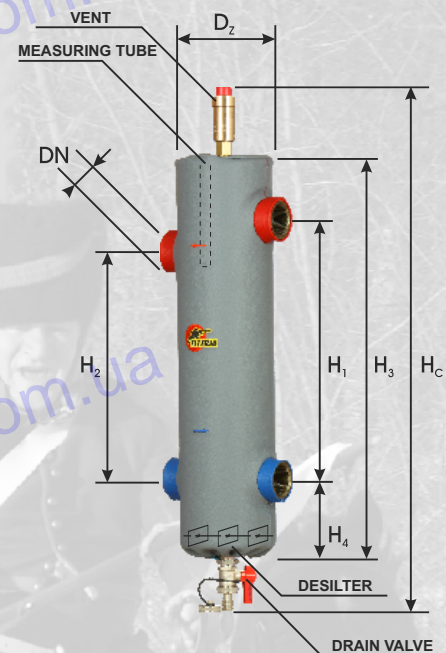

SHE-OC ELTERM INSULATED HYDRAULIC BALANCERS

SHE40-OC



25/65
up to 40kW

SHE70-OC



32/80
up to 70kW

SHE100-OC



40/100
up to 100kW

SHE115-OC



50/100
up to 115kW

LEATHERETTE COAT



WE ALSO RECOMMEND

