



HYDRAULIC BALANCERS - SHE ELTERM

	SHE40 25/65	SHE70 32/80	SHE100 40/100	SHE115 50/100	SHE225 65/150	SHE420 80/200
Catalogue no.	SHE40	SHE70	SHE100	SHE115	SHE225	SHE420
Max. flow	2,3m ³ /h	4,0m ³ /h	5,7m ³ /h	6,6m ³ /h	12,9m ³ /h	24m ³ /h
Max power at ΔT=15K	up to 40kW	up to 70kW	up to 100kW	up to 115kW	up to 225kW	up to 420kW
4 connectors	1" coupling	coupling fem. thread 5/4"	male thread 1½"	male thread 2"	flange 2½"	flange male thread 3"
Max. temperature	110°C	110°C	110°C	110°C	110°C	110°C
Nominal pressure	3 bar	3 bar	3 bar	3 bar	3 bar	3 bar
H ₁	290 mm	340 mm	340 mm	400 mm	565 mm	680 mm
H ₂	255 mm	300 mm	300 mm	350 mm	500 mm	600 mm
H ₃	410 mm	470 mm	470 mm	545 mm	735 mm	875 mm
H ₄	65 mm	65 mm	65 mm	75 mm	90 mm	105 mm
H _c	590 mm	650 mm	650 mm	725 mm	915 mm	1055 mm
D _z	Ø 75 mm	Ø 90 mm	Ø 114 mm	Ø 114 mm	Ø 159 mm	Ø 219 mm
Capacity V	1,0 l	1,6 l	2,7 l	3,2 l	8,9 l	19,7 l
p x V (bar x l)	2,5	6,8	6,8	8	22	49
Vent + drain valve	w kpl.	w kpl.	w kpl.	w kpl.	w kpl.	w kpl.

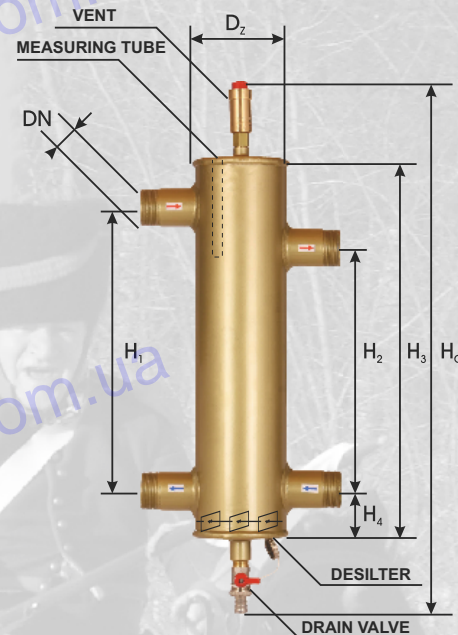

EXEMPLARY APPLICATION OF SHE HYDRAULIC BALANCER

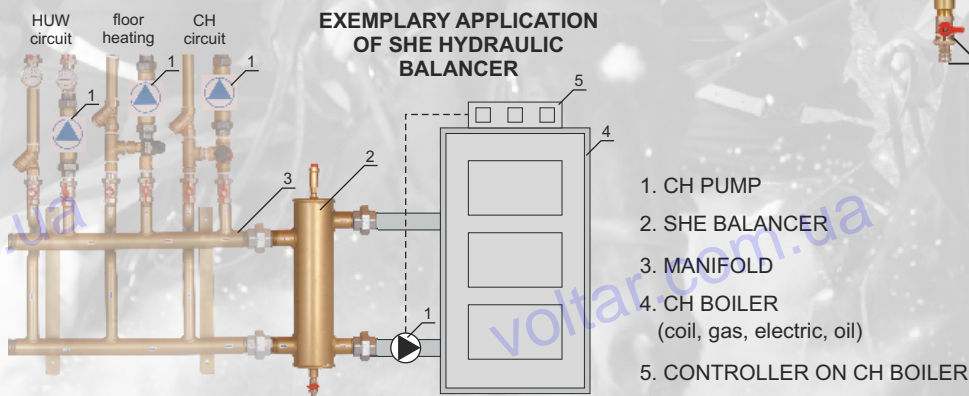

SHE HYDRAULIC BALANCERS

